



**CC-2015-01 Zoning Text Amendment, Section 19-107 Definition of Structure Height**

***AN ORDINANCE TO AMEND SECTION 19-107. DEFINITIONS OF THE CITY OF CLEMSON ZONING ORDINANCE TO AMEND THE MEASUREMENT FOR STRUCTURES WITH A PITCHED ROOF AND CLARIFY THE DEFINITION OF STRUCTURE HEIGHT.***



***Amend Section 19-107 Definitions to replace the definition of Structure height as follows:***

***Structure height*** means the vertical distance from the average finished ground elevation at the front of the building (as determined by the main entrance of the building defined by the architect) or from the finished floor of a plaza spanning 65% or more of the front of the building to:

- (a) The highest parapet or roofline of a flat roof (see Figure 1.15);

# CC-2015-01 Zoning Text Amendment, Section 19-107 Definition of Structure Height

Figure 1.15: Structure Height, Parapet or Flat Roof

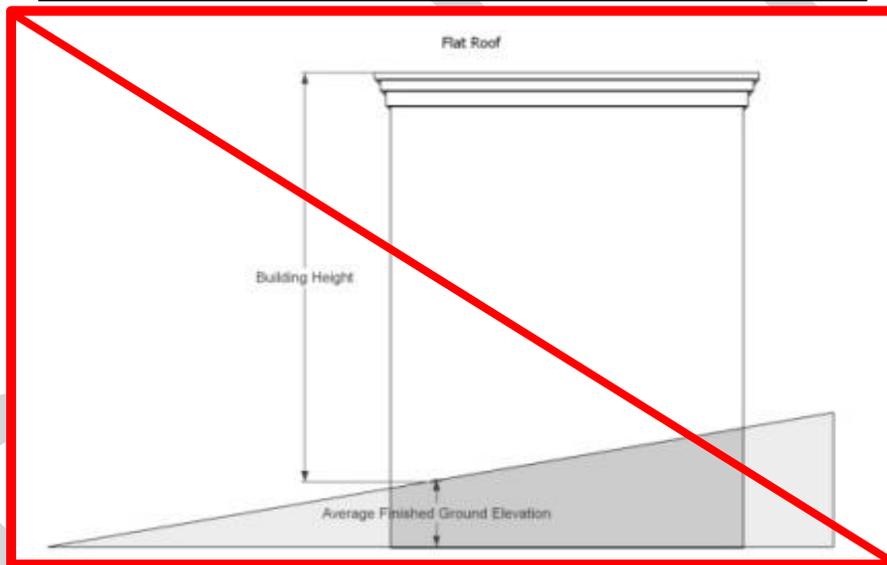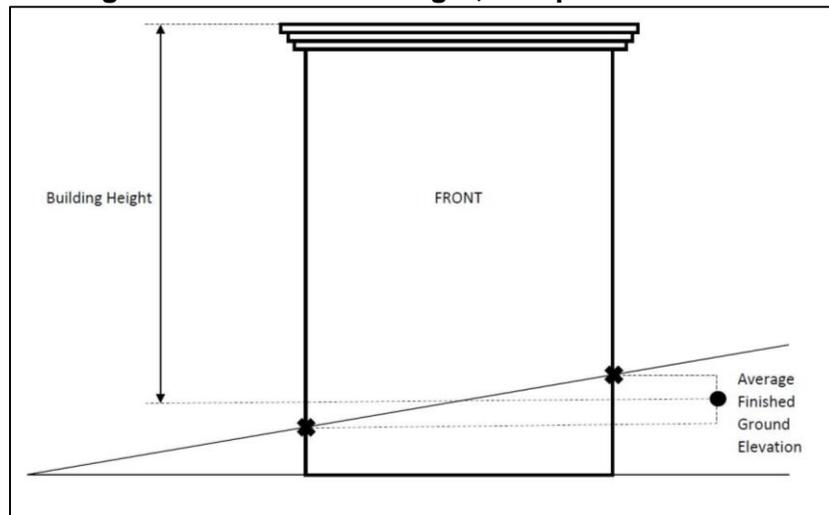


Source: City of Clemson

- (b) ~~The mean height between the eave and the ridge of the highest pitched roof~~ The ridge of the highest pitched roof (see Figure 1.16); or

# CC-2015-01 Zoning Text Amendment, Section 19-107 Definition of Structure Height

Figure 1.16: Structure Height, Pitched Roof

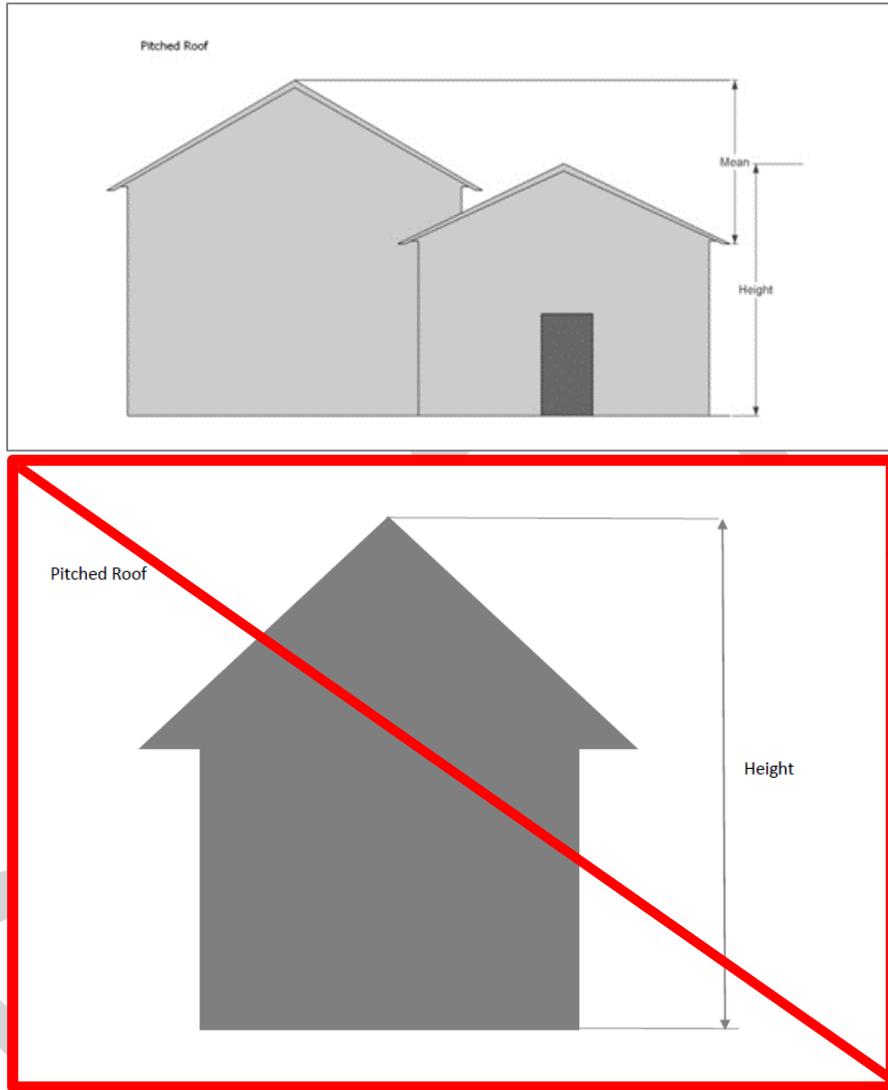


Source: City of Clemson

(c) The highest deck line of a mansard roof (see Figure 1.17).

**CC-2015-01 Zoning Text Amendment, Section 19-107 Definition of Structure Height**

**Figure 1.17: Structure Height, Mansard Roof**

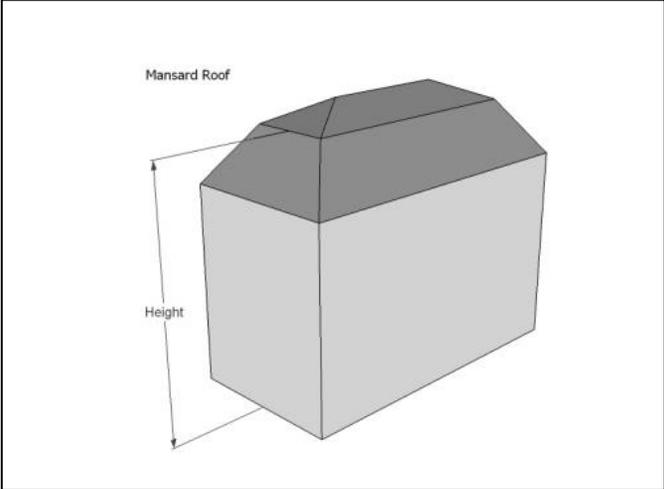

Source: City of Clemson

DRAFT